120 watt - LED Flood Light

EO-FLW-120W

SPECIFICATIONS	
Model Number	EO-FLW-120W
Power Consumption	126 watts (LCP)
LED Consumption	1 x 120 watt Bridgelux
Driver	Meanwell
LED Initial Flux	13,200 lumens
LED Luminous Efficiency	110 lumens/watts
Exit Lumens	11,200 lumens
Average Lumens	4m - 273.91 lux 6m - 121.61 lux 8m - 68.38 lux 10m - 43.77 lux
Illuminated Area	At 6m - 16m diameter At 8m - 21m diameter At 10m - 26m diameter At 12m - 32m diameter
Light Angle	120°
Power Factor	0.9
Input Voltage	AC 240V
Storage Temperature	-25°C - +65°C (25°C)
Working Temperature	-40°C - +55°C
IP Rating	IP65
Colour Temperature	5500 kelvin
Colour Index	>Ra75
Certificate	CS 9567N IEC 60598.2.1B IEC 61346.2.13:2006 N28689
Life Expectancy	50,000 + Hrs
Weight	11.6
Warranty	5 Years

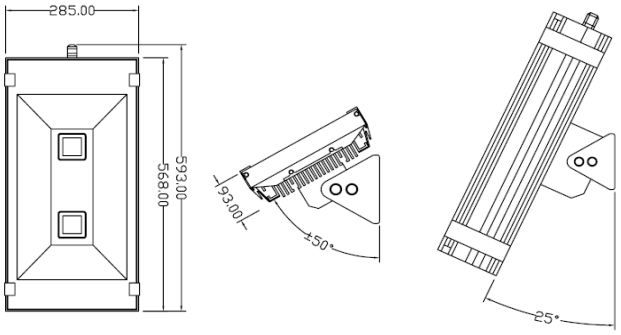

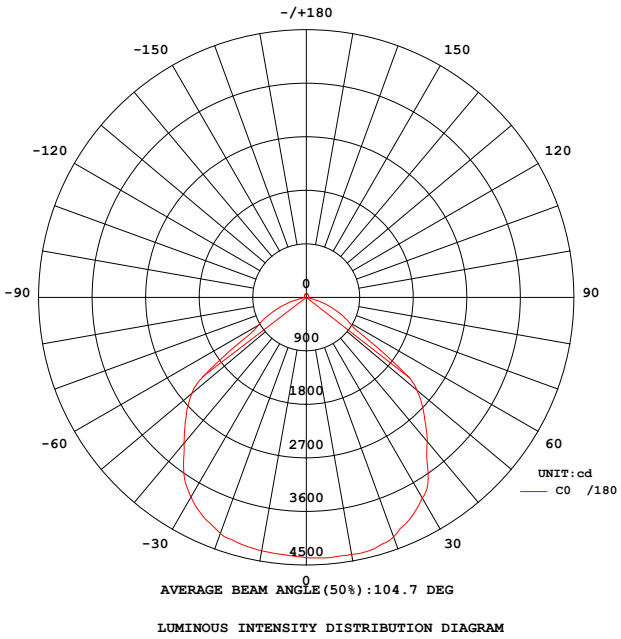

This product is elegible for the NSW Energy Savings Scheme
For more information visit our website: www.eolighting.com

© Summit LED Energy Australia Pty Ltd t/as eo lighting

Head Office Sydney: Unit 5G, 256 New Line Road, Dural, NSW, 2158

Ph: 02 9653 9909 **Fax:** 02 9653 9959 **www.eolighting.com.au**

Melbourne Canberra Brisbane
Sydney Adelaide Perth

Green Energy LED Solutions