


LED Emergency Batten



EO- 600-2x10-EM



SPECIFICATIONS	
Product Model Code	EO-600-2x10-EM
Colour	White
Length	600mm
Lens	Prismatic Diffuser, Wireguard or Bare Batten
Input Voltage	240 Volts, 50 Hz
Power Consumption	19.2 watts
Light Output	(Tube 925 lm x 2)
LED Efficiency	100lm/watt
Beam Angle	120°
Colour Rendering Index	>82 CRI
Power Factor	0.95
Operating Humidity	>95%
Operating Temperature	-20° to 50°C
Emergency Duration	2 hours
Battery Type	NiMH (contains no cadmium)
Lamps Efficiency	>85%
Material	Body – White power coated steel Tube - Aluminium & Thermoplastic
Colour Temperature	Warm White 2700 - 3500 kelvin Cool White 4000 - 5000 kelvin Daylight 5500 - 6500 kelvin
Certificate	Batten – Temperature & Duration – Light Labe International – LL1118701T Emergency Classification – Light Lab International – LL14729 Led Tube (Electrical Product Certification Services Australia)Electrical Compliance SGS # 100839 complies with AS/NZS60598.2.1:1998 with AZ/NZS60598.1:2003 and ICE 61347.2.13:2006 and 61347.1:2002 (certified 5/1/11 Exp 4/1/16) NSW Dept of Fair Trading Certificate of Suitability CS9633  N28689
Green Energy Scheme	This product is approved for use in NSW ESS and VEET
Net Weight	233g
Life Expectancy	50,000 + Hrs
Warranty	4 Years (12 months on battery)

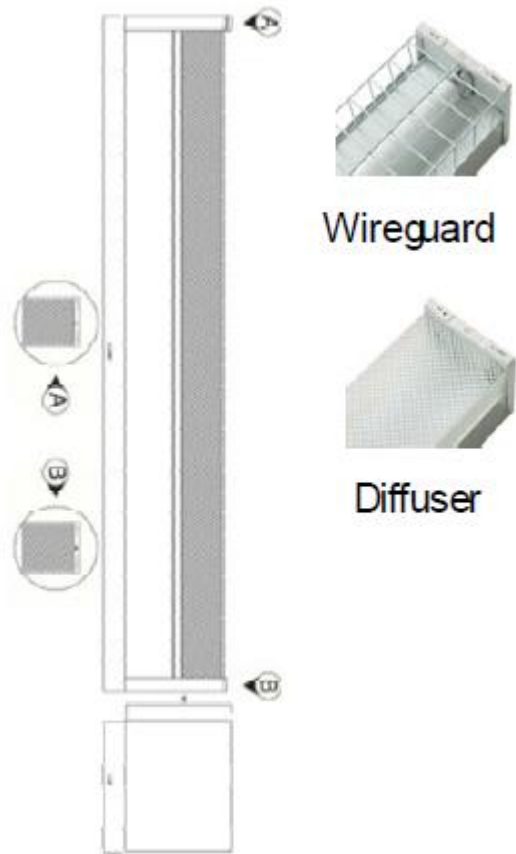

Wireguard – EO-WG-600

Diffuser – EO-DF-600

For more information visit our website
www.eolighting.com.au