# 150 watt - LED Flood Light

# EO-FLW-150W

| SPECIFICATIONS | |
|---|---|
| **Model Number** | EO-FLW-150W |
| **Power Consump on** | 155 watts (LCP) |
| **LED Consump on** | 1 x 150 watt Bridgelux |
| **Driver** | Meanwell |
| **LED Ini al Flux** | 14,500 lumens |
| **LED Luminous Efficiency** | 93 lumens/watt |
| **Exit Lumens** | 13,485 lumens |
| **Average Lumens** | 4m - 300 lux<br>6m - 140 lux<br>8m - 80 lux<br>10m - 50 lux |
| **Illuminated Area** | At 4m - 11m diameter<br>At 6m - 17m diameter<br>At 8m - 22m diameter<br>At 10m - 28m diameter<br>At 12m - 33m diameter |
| **Light Angle** | 120° |
| **Power Factor** | 0.9 |
| **Input Voltage** | AC 240V |
| **Storage Temperature** | -25°C - +65°C (25°C) |
| **Working Temperature** | -40°C - +55°C |
| **IP Ra ng** | IP65 |
| **Colour Temperature** | 5500 kelvin |
| **Colour Index** | >Ra75 |
| **Cer ficate** | CS 9567N<br>IEC 60598.2.1B IEC 61346.2.13:2006<br>N28689 |
| **Life Expectancy** | 50,000 + Hrs |
| **Weight** | 14 kg |
| **Warranty** | 5 Years |

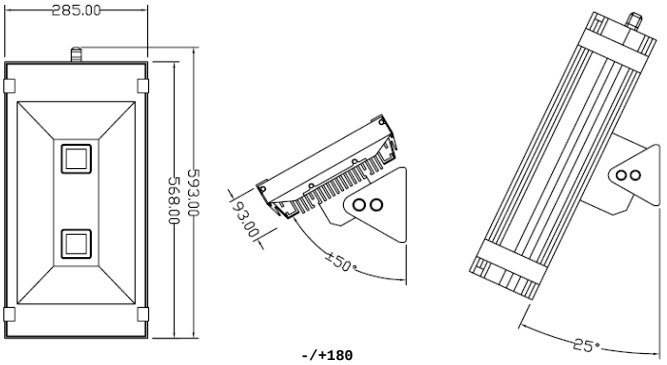


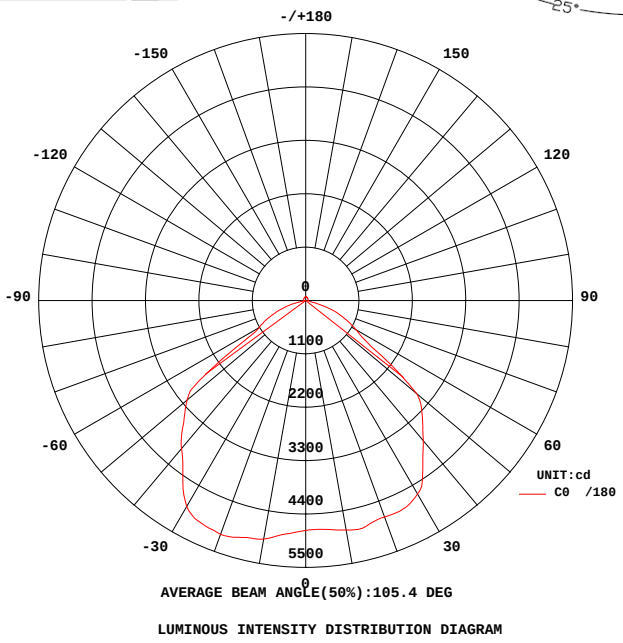


This product is elegible for the NSW Energy Savings Scheme
For more information on visit our website: www.eolighting.com.au

© Summit LED Energy Australia Pty Ltd t/as eo lighting

**Head Office Sydney:** Unit 5G, 256 New Line Road, Dural, NSW, 2158

**Ph:** 02 9653 9909 **Fax:** 02 9653 9959 **www.eolighting.com.au**

Melbourne Canberra Brisbane
Sydney Adelaide Perth

Green Energy LED Solutions