

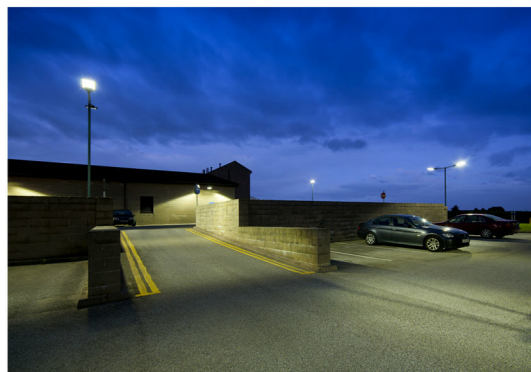


## 200 watt - LED Flood Light

## EO-FLW-200W

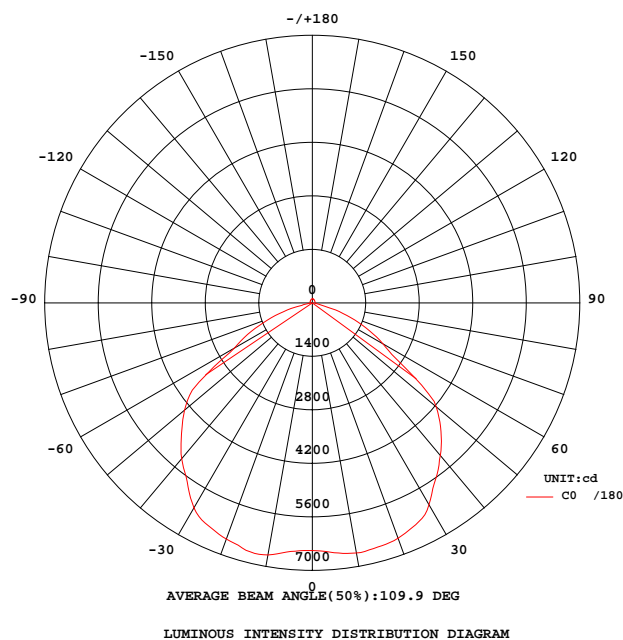

SPECIFICATIONS	
Model Number	EO-FLW-200W
Power Consumption	212 watts (LCP)
LED Consumption	1 x 200 watt Bridgelux
Driver	Meanwell
LED Initial Flux	22,000 lumens
LED Luminous Efficiency	85.0 lumens/watts
Exit Lumens	18,700 lumens
Average Lumens	4m - 410 lux 6m - 185 lux 8m - 105 lux 10m - 70 lux 12m - 36 lux
Illuminated Area	At 6m - 18m diameter At 8m - 24m diameter At 10m - 30m diameter At 12m - 35m diameter
Light Angle	120°
Power Factor	0.92
Input Voltage	AC 240V
Storage Temperature	-25°C - +65°C (25°C)
Working Temperature	-40°C - +55°C
IP Rating	IP65
Colour Temperature	5500 kelvin
Colour Index	>Ra75
Certificate	CS 9567N IEC 60598.2.1B IEC 61346.2.13:2006 N28689
Life Expectancy	50,000 Hours
Weight	20 Kg
Warranty	5 Years

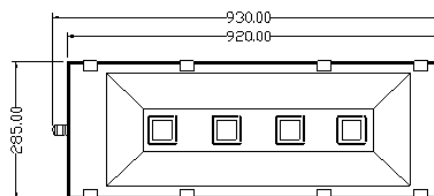

This Product is eligible for the NSW Energy Savings Scheme For more information on visit our website: [www.eolighting.com.au](http://www.eolighting.com.au)