

LED Emergency batten


EO-1200-1 x 18-EM




Bare Batten

Wireguard

Diffuser

SPECIFICATIONS	
Product Code	Eo-1200-1x18-EM Batten
Colour	White
Power Consumption	16.5W
Beam angle	120 degree
Lens	Clear or Frosted cover available
Operational Voltage/ Frequency	180-240V, 50 -60Hz
Colour Temperature	Warm White 2700K -3500K Cool White 4000K, 5000K Daylight 6000K-6500K
Light Output	(Tube) 1510lm – 1630lm
Colour Rendering Index	>82 CRI
Power Factor	>0.95
Operating Humidity	>95%
Operating Temperature	-20' to 50' C
Emergency Duration	2 hours
Battery Type	NiMH (contains no Cadmium)
Efficiency	100 lm/ watt
Housing	Body – White powder coated steel Tube- Aluminium & Thermoplastic
No. of LEDs	252 x SMD
Expected Life	50,000 + hours
Compliance	Batten- Temperature & Duration- Light Lab International – LL111 8701T Emergency Classification – Light Lab International – LL14729 Led tube (Electrical Product Certification Services AUSTRALIA) electrical compliance SGS No.100839 compiles with AS/NZS60598.2.1:1998 with AS/NZS60598. 1:2003 and ICE 61347.2.13:2006 and 61347. 1:2002 (certified 5 th Jan 2011 expiry 4 th Jan 2016) NSW Dept of Fair Trading Certificate of Suitability CS9633  N28689
Green Energy Scheme	This product is approved for use in NSW Energy Saving Scheme and Victorian Energy Efficient Target scheme
Net Weight	3315g
Warranty	4 years

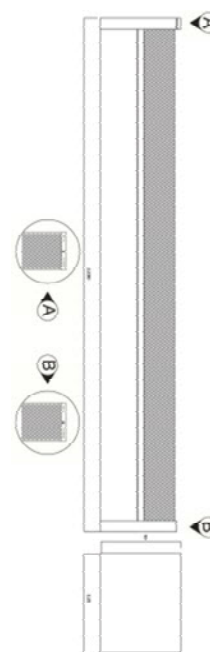

For more information visit our website: www.eolighting.com.au