

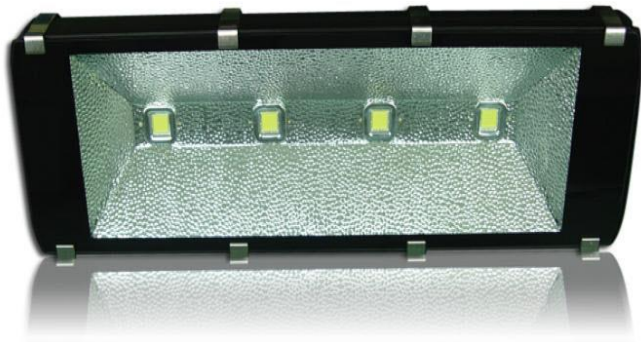


200 Watt LED Flood Light

EO-FLW-200W

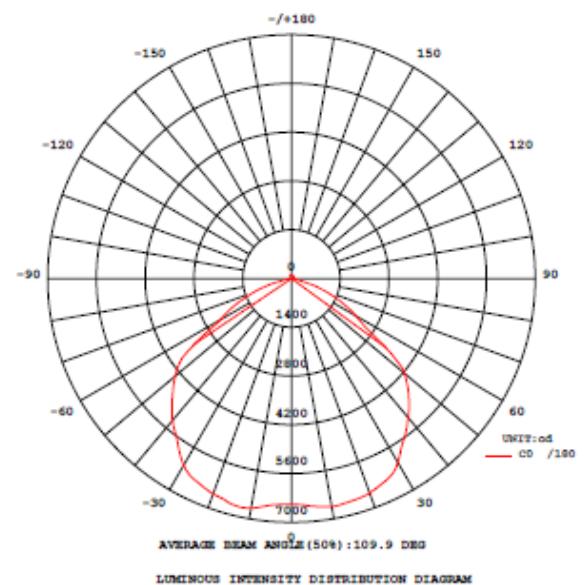

SPECIFICATIONS	
Model Number	EO-FLW-200W
Driver	Built In
Power Consumption	211w (LCP)
LED	Bridgelux BXRC-50C4000-F
LED Luminous Flux	16,766 Lumens
LED Luminous Efficiency	79.46 lm/watt
Average Illumination	4m - 410 lux 6m - 185 lux 8m - 105 lux 7m - 36 lux
Illuminated Area	At 6m - 18m diameter At 8m - 42m diameter At 10m - 30m diameter At 12m - 33m diameter
Light Angle	120°
Input Voltage	240 Volts, 50 Hz
Power Factor	>0.96
Storage Temperature	-25°C - +65°C
Working Environment	-25°C - +50°C
Body Material	Die Cast Aluminium Alloy and Glass
IP Rating	IP 65
Rendering Index CRI	Ra 75.9
Colour Temperature	5500 Kelvin Standard Other kelvins available to order
Certificate	CS 9567N IEC 60598.2.5 IEC 61346.2.13:2006 N28689
Life Expectancy	>50,000 hrs
Net Weight	20 kg
Warranty	5 years

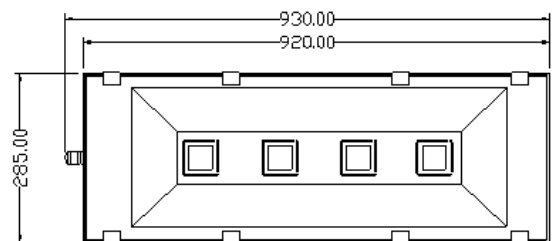

This product is eligible for the NSW Energy Saving Scheme
For more information visit our website: www.eolighting.com.au