80 Watt LED High Bay

EO-HB-80W

Unique high performance polished rimless reflector

SPECIFICATIONS	
Model Number	EO-HB-80W
Driver	Built In
Power Consumption	86w (LCP)
LED	Citizen – CLL042-1218A5-503M1A2
LED Luminous Flux	8127 Lumens
LED Luminous Efficiency	96.86 lm/watt
Average Illumination and Effective Illumination Area	4m Height – 15m x 5m - ≥40LUX 5m Height – 18m x 5m - ≥26LUX 6m Height – 21m x 6m - ≥18LUX 7m Height – 25m x 7m - ≥13LUX
Illuminated Area	At 4m – 3.4m diameter At 6m – 5.3m diameter At 8m – 6.8m diameter At 10m – 9.6m diameter
Input Voltage	240 Volts, 50 Hz
Power Factor	0.964
Working Environment	-25°C - +50C°
Body Material	Die Cast Aluminium Alloy and PC
Reflector	30, 60 & 120' high performance polished photometrically optimized rimless reflectors available Please specify when ordering
IP Rating	IP 65
Rendering Index CRI	Ra 69.8
Colour Temperature	5500 Kelvin Standard Other kelvins available to order
Certificate	CS 9567N IEC 605982.1B IEC 61346.2.13:2006 N28689
Life Expectancy	>42,000 hrs
Net Weight	7.9 kg
Warranty	3 years

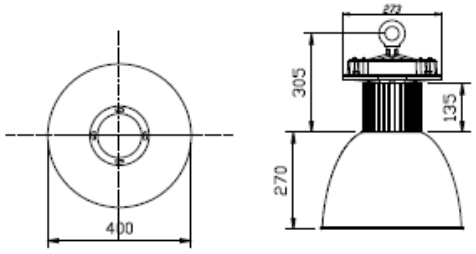

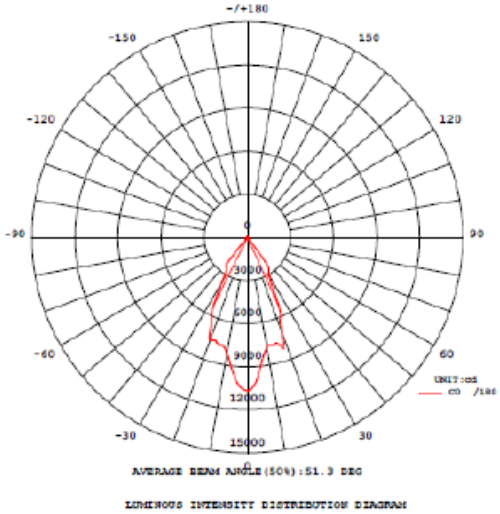

This product is eligible for the NSW Energy Saving Scheme

For more information visit our website: www.eolighting.com.au

© Summit LED Energy Australia Pty Ltd t/as eo lighting

Head Office Sydney: Unit 5G, 256 New Line Road, Dural, NSW, 2158

Ph: 02 9653 9909 **Fax:** 02 9653 9959 **www.eolighting.com.au**

Melbourne Canberra Brisbane
Sydney Adelaide Perth

Green Energy LED Solutions