




600 x 600 LED Ceiling Panel

EO- LPL 600x600-40W




Application: suitable for office, warehouse, showroom, retail

SPECIFICATIONS	
Product Code	Eo-LPL 600 x 600-40W
Colour	White / Silver
Power Consumption	39.3W
LED type	SMD2835
Driver	Lifud LF-GIR040YA1000(U)
Dali Dimmable	Option available
Beam angle	110 degree
Lens	Frosted cover
Operational Voltage/ Frequency	240V, 50 -60Hz
Colour Temperature	Warm White -3500K Cool White -4000K Daylight - 6000K
Light Output	Warm White -3600lm Cool White -3900lm Daylight -4000lm
Colour Rendering Index	>80 CRI
Power Factor	>0.90
Operating Humidity	>95%
Operating Temperature	-20' to 45'C
Efficiency	100 lm/ watt
Housing	Aluminium & Thermoplastic Non ceramic
Expected Life	80,000 + hours
Compliance	C-Tick- Conforms to AS/NZS CISPR15- compliance Certificate No. LCS1605181513E 01 29 June 2016 SAA Certificate no. 161304 compiles with AS/NZS 60598.2.1:1998 with AS/NZS 60598. 1:2003 and ICE 61347.2.13:2006 and 61347. 1:2002 (certified 6 th July 2016 expiry 6 th July 2021)  N28689
Dimensions	595 x 595x 11.5mm
Net Weight	3.0kg
Warranty	5 years



Suspension & set recessed ceiling frame kits available optional extra

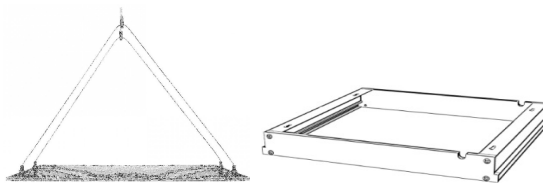

For more information visit our website:

www.eolighting.com.au