



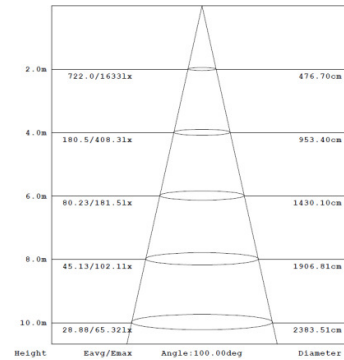
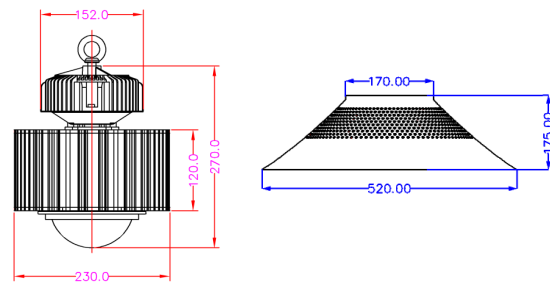
150 Watt LED High Bay

EO-HB-150W-II



Unique photo-metrically optimised - rimless reflector

SPECIFICATIONS	
Model Number	EO-HB-150W-II
Optional Microwave Sensor	Daylight & Occupancy
Driver	Meanwell HGB
LED Chip	Phillips Luxeon 3030
Power Consumption	147.3 (LCP)
LED Luminous Flux	>18,000 Lm +/- 5%
LED Luminous Efficiency	≥120Lm /W
Lumen Maintenance L70	70% > 54,000 hrs
Illuminated Area	At 4m – 11m diameter At 6m – 17m diameter At 8m – 25m diameter At 10m – 29m diameter
Input Voltage	240 Volts, 50 Hz
Power Factor	>0.93
Working Environment	-40°C - +60°C
Body Material	Die Cast Aluminium Alloy and PC
Reflector	30, 60 & 100' high performance polished photometrically optimized rimless reflectors available Please specify when ordering
IP Rating	IP 65
Rendering Index CRI	Ra >70
Colour Temperature	5500 Kelvin Standard Other kelvins available to order
Certificate	SAA 161 296 IEC 605982.1B IEC 61346.2.13:2006  N28689
Life Expectancy	>50,000 hrs
Net Weight	4.5 kg
Warranty	5 years



For more information visit our website: www.eolighting.com.au