


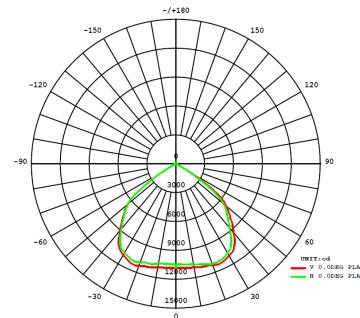
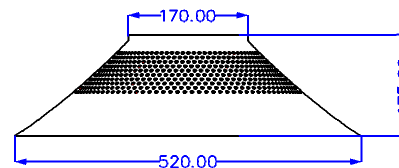

# 250 Watt LED High Bay

# EO-HB-250W-II



Unique photo-metrically optimised -rimless reflector

SPECIFICATIONS	
<b>Model Number</b>	EO-HB-250W-II
<b>Optional Microwave Sensor</b>	Daylight & Occupancy
<b>Driver</b>	Meanwell HGB
<b>LED Chip</b>	Phillips Luxeon 3030
<b>Power Consumption</b>	246.7 (LCP)
<b>LED Luminous Flux</b>	>25,000Lm
<b>LED Luminous Efficiency</b>	≥120Lm /W
<b>Lumen Maintenance L70</b>	70% > 54,000 hrs
<b>Illuminated Area</b>	At 4m – 11m diameter At 6m – 17m diameter At 8m – 25m diameter At 10m – 29m diameter
<b>Input Voltage</b>	240 Volts, 50 Hz
<b>Power Factor</b>	>0.93
<b>Working Environment</b>	-40°C - +60°C
<b>Body Material</b>	Die Cast Aluminium Alloy and PC
<b>Reflector</b>	30, 60 & 100' high performance polished photometrically optimized rimless reflectors available Please specify when ordering
<b>IP Rating</b>	IP 65
<b>Rendering Index CRI</b>	Ra >70
<b>Colour Temperature</b>	5500 Kelvin Standard Other kelvins available to order
<b>Certificate</b>	SAA 161 296 IEC 605982.1B IEC 61346.2.13:2006  N28689
<b>Life Expectancy</b>	>50,000 hrs
<b>Net Weight</b>	9 kg
<b>Warranty</b>	5 years



For more information visit our website: [www.eolighting.com.au](http://www.eolighting.com.au)