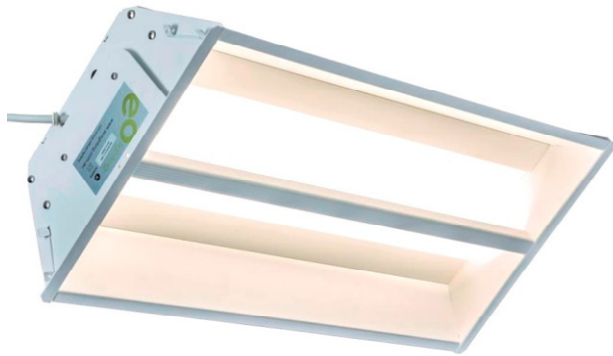

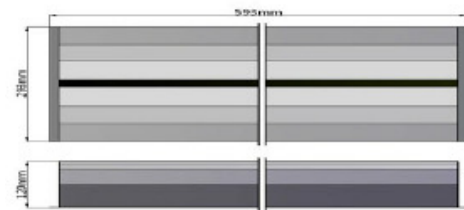
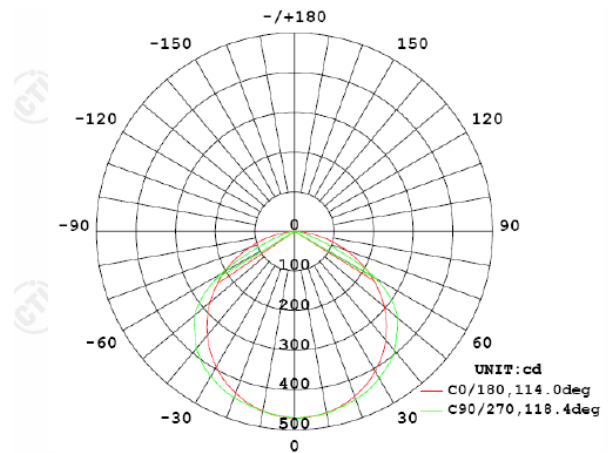


# 15 Watt LED Integrated Linear Troffer

# EO-ILT-600-15W



SPECIFICATIONS	
Model Number	EO-ILT-600-15W
Beam Angle	120°
Input Power	14.4 watts (LCP)
Total Luminous Flux	1306 lumens
LED Luminous Efficiency	>90 lumens / watt
Reflector	Reverse gullwing- DLR Dupont photometric reflector
Power Factor	>0.93
Input Voltage	240 Volts, 50 Hz
Lamps Efficiency	>85%
Material	Aluminium Housing
Working Temperature	- 25°C to + 50°C
IP Rating	IP 20
Colour Temperature	Warm White 3000 - 3500 kelvin Cool White 4000 - 4500 kelvin Daylight 5500 - 6000 kelvin
Colour Rendering Index CRI	>Ra82
Certificate	AS/NZS CISPR 15:2011 SAA 151638 IEC 60598.2.1:2014 IEC 61346.2.1:2003  N28689
Dimensions	593 x 293 x 120mm
Net Weight	3.4Kg
Life Expectancy	50,000 + Hrs
Unique Patent Design	Design Registration 364721
Warranty	5 Years



Architectural grade- low glare - indirect recessed lighting - high dispersion – suit standard T bar ceiling grid –

High efficiency replacement for T8 and T5 troffer lighting – unique patent pending design



Application: Office lighting, library,, education, retail, healthcare and industrial

© Summit LED Energy Australia Pty Ltd t/as eo lighting

**Head Office Sydney:** Unit 5G, 256 New Line Road, Dural, NSW, 2158

**Ph:** 02 9653 9909 **Fax:** 02 9653 9959 **[www.eolighting.com.au](http://www.eolighting.com.au)**

**Melbourne**  
**Sydney**

**Canberra**  
**Adelaide**

**Brisbane**  
**Perth**



**Green Energy LED Solutions**