

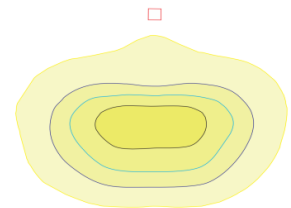


200 Watt LED Billboard Flood

EO-FL3-200W



SPECIFICATIONS	
Model Number	EO-FL3-200W
Driver	Meanwell
Power Consumption	200w
LED	Nichia Chips
LED Luminous Flux	21,000 Lumens
Beam angle	Unidirectional 55'
Input Voltage	240 Volts, 50/60Hz
Total Harmonic Distortion	< 15%
Power Factor	>0.95
Working Environment	-40°C - +55°C
Working Humidity	15%-90% RH
Body Material	Die Cast Aluminium Alloy and PC
IP Rating	IP 65
Colour Index CRI	Ra >70
Colour Temperature	4500-5500 Kelvin Standard Other kelvins available to order
Certificate	IEC 605982.1B IEC 61346.2.13:2006 N28689
Life Expectancy	>50,000 hrs
Dimensions	607 x360 x90mm
Net Weight	11.5 kg
Warranty	5 years

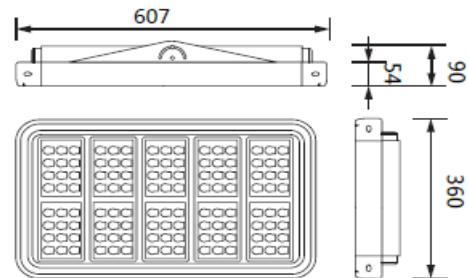


Easy Power Replacement



Integrated Radiator



Patented Lens

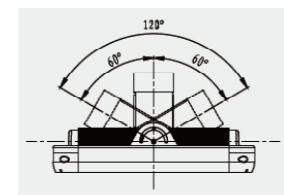

120° Angle Adjustable

Application: suitable for billboard, outdoor signage, building wall lighting
 For more information visit our website: www.eolighting.com.au