



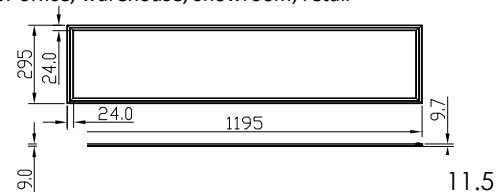
300 x 1200mm LED Ceiling Panel

EO-LPL 300x1200-30W



Low Glare Optimised Lens-diffuser - Application: suitable for office, warehouse, showroom, retail

SPECIFICATIONS	
Product Code	EO-LPL 300x1200-30W
Colour	White /Silver
Power Consumption	30.05W (LCP)
LED type	SMD4014
Driver	'Unique' AU26704C0700
Beam angle	110 degree
Lens	Low glare optimised lens- diffuser
UGR	<19
Operational Voltage/ Frequency	240V, 50 -60Hz
Colour Temperature	Warm White -3000K Cool White -4000K Daylight - 6000K
Light Output	Warm White -2800lm Cool White -2950lm Daylight -3100lm
Colour Rendering Index	>80 CRI
Power Factor	>0.90
Operating Humidity	>95%
Operating Temperature	-20' to 45'C
Housing	Aluminium & Thermoplastic Non ceramic
Expected Life	80,000 + hours
Compliance	C-Tick- Conforms to AS/NZS CISPR15- compliance Certificate No. LCS1605181513E 01 29 June 2016 SAA Certificate No. 161304 compiles with AS/NZS 60598.2.1:1998 with AS/NZS 60598. 1:2003 and ICE 61347.2.13:2006 and 61347. 1:2002 (certified 6 th July 2016 expiry 6 th July 2021)  N28689
Dimensions	295 x 1195 x 11.5mm
Net Weight	2 kg
Warranty	5 years



Suspension & set recessed ceiling frame kits available optional extra



For more information visit our website:

www.eolighting.com.au