




## 600 x 600mm LED Ceiling Panel

## EO- LPL-600x600-36W




Low Glare Optimised Lens Diffuser - Application: suitable for office, warehouse, showroom, retail

SPECIFICATIONS	
Product Code	Eo-LPL-600 x 600-36W
Colour	White / Silver
Power Consumption	37.57W (LCP)
LED type	SMD4014
Driver	'Unique' AU26700870
Dali Dimmable	Option available
Beam angle	110 degree
Lens	Low glare optimised diffused lens
UGR	<19
Operational Voltage/ Frequency	240V, 50 -60Hz
Colour Temperature	Warm White -3500K Cool White -4000K Daylight -6000K
Light Output	Warm White -3200lm Cool White -3600lm Daylight -3900lm
Colour Rendering Index	>80 CRI
Power Factor	>0.90
Operating Humidity	>95%
Operating Temperature	-20' to 45'C
Efficiency	100 lm/ watt
Housing	Aluminium & Thermoplastic Non ceramic
Expected Life	80,000 + hours
Compliance	C-Tick- Conforms to AS/NZS CISPR15- compliance Certificate No. LCS1605181513E 01 29 June 2016 SAA Certificate No. 161304 compiles with AS/NZS 60598.2.1:1998 with AS/NZS 60598. 1:2003 and ICE 61347.2.13:2006 and 61347. 1:2002 (certified 6 <sup>th</sup> July 2016 expiry 6 <sup>th</sup> July 2021)  N28689
Dimensions	595 x 595x 11.5mm
Net Weight	3.0kg
Warranty	5 years



Suspension & set recessed ceiling frame kits available optional extra

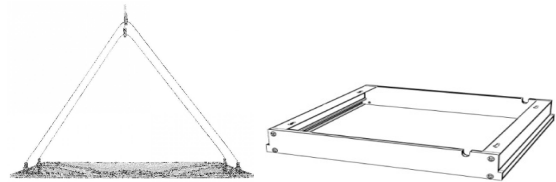

For more information visit our website:

[www.eolighting.com.au](http://www.eolighting.com.au)