


LED Integrated Linear Troffer





Ultra-low glare – wide dispersion - high efficiency – T bar troffer

EO-ILT-AU-1200-20W



SPECIFICATIONS	
Product Code	EO-ILT-AU-1200-20W
Beam Angle	120°
Wattage Consumption	20.37 watts (LCP)
Power Factor	0.931
Total Luminous Flux	2891 lumens
LED Luminous Efficiency	>108.34 lumens / watt
Reflector	Reverse gullwing- DLR DuPont photometric optimised reflector
Input Voltage (LED)	24 Volts, DC
Power Supply	Input 240AC 50/60Hz 1.5A Output 24V- 1.5A 36W (non dim) Opt: Dimmable or DALI Driver available
Unified Glare factor	Crosswise <20.5 UGR av Endwise < 17.5 UGR av
Lamps Efficiency	>85%
Material	Australian Aluminium Housing
Working Temperature	-25°C to +50°C
IP Rating	IP 20
Colour Temperature	Cool White 4000 - 4200 Kelvin Daylight 5000 - 5200 Kelvin (Custom colour temps available)
Colour Rendering Index	Ra 83
Certificate	AS/NZS CISPR 15:2011 SAA 151638 IEC 60598.2.1:2014 IEC 61346.2.1:2003  N28689
Dimensions	1193 L x 293 W x 87.33 H mm
Net Weight	5kg
Life Expectancy	>50,000 Hrs
Unique Patent Design	IP Design Registration 201513769
Warranty	5 years electronics 10 years on body

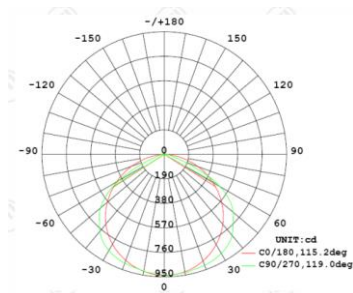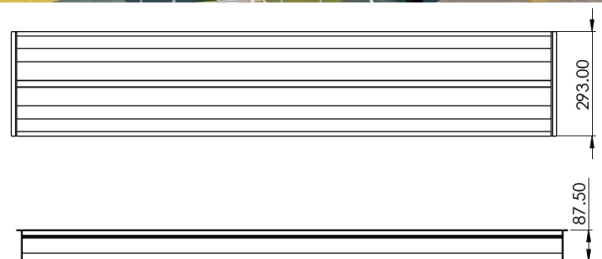

Optional air handling frame available

Architectural grade- Ultra Low glare – high dispersion
Indirect recessed lighting
suits standard T bar ceiling grid

High efficiency replacement for T8 and T5 troffer lighting

Application: Office lighting, library, education, retail,
healthcare and industrial



AUSTRALIAN MADE Proudly manufactured & made in Australia