






# 50 watt - LED Flood Light

# EO-FLW-50W



SPECIFICATIONS	
Model Number	EO-FLW-50W
Power Consumption	56 watts (LCP)
LED Consumption	1 x 50 watt Bridgelux
Driver	Meanwell
LED Initial Flux	5,000 lumens
LED Luminous Efficiency	91.3 lumens/watts
Exit Lumens	4,566 lumens
Average Lumens	4m - 48.23 - 133.31 lux 6m - 21.43 - 59.25 lux 8m - 12.06 - 33.33lux
Illuminated Area	At 4m - 9m diameter At 6m - 14m diameter At 8m - 18m diameter At 10m - 23m diameter
Light Angle	120°
Power Factor	0.9
Input Voltage	AC 240V
Storage Temperature	-25°C - +65°C (25°C)
Working Temperature	-40°C - +55°C
IP Rating	IP65
Colour Temperature	5500 kelvin
Colour Index	>Ra75
Certificate	CS 9567N IEC 60598.2.1B IEC 61346.2.13:2006 N28689
Life Expectancy	50,000 + Hrs
Weight	4.5 kg (Carton of 4 = 18.4kg)
Warranty	3 Years

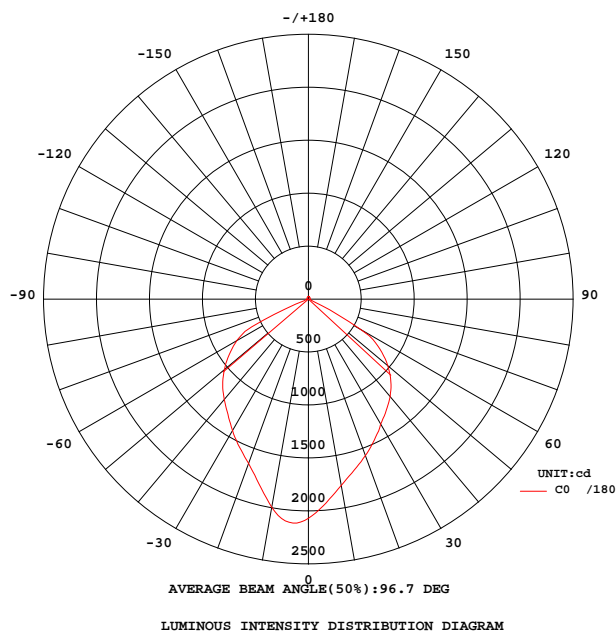

This product is eligible for the NSW Energy Savings Scheme  
For more information on visit our website: [www.eolighting.com.au](http://www.eolighting.com.au)

