


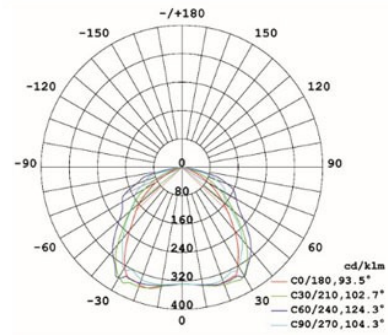
160 Watt LED Pole Mount Flood

EO-PF-160W




SPECIFICATIONS	
Model Number	EO-PF-160W
Driver	Built In
Power Consumption	160w
LED	Luxeon T Chips
LED Luminous Flux	17,600 Lumens
Beam angle	90° x 100°
Average Lumens	5m - 255 Lux 6m - 177 Lux 7m - 130 Lux 8m - 99 Lux 9m - 78 Lux
Illuminated Area	At 5m - 13.0m diameter At 6m - 15.7m diameter At 7m - 18.3 diameter At 8m - 21.0 diameter At 9m - 23.6 diameter
Input Voltage	240 Volts, 50 Hz
Power Factor	>0.95
Working Environment	-40°C - +50°C
Body Material	Die Cast Aluminium Alloy and PC
IP Rating	IP 65
Colour Index CRI	Ra 70
Colour Temperature	5700 Kelvin Standard Other kelvins available to order
Certificate	CS 9567N IEC 605982.1B IEC 61346.2.13:2006  N28689
Life Expectancy	>45,000 hrs
Dimensions	303.6x 392x 196mm
Spigot Pole size	67mm internal diameter
Net Weight	7.15 kg
Warranty	5years

ISO-Illuminance Curve



AAI Figure

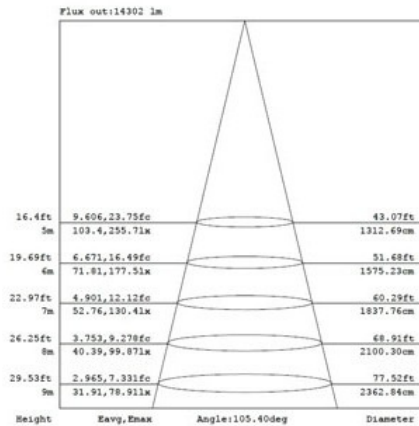

For more information visit our website: www.eolighting.com.au