




# 100 Watt LED High Bay

# EO-HB-100W-II



Unique photo-metrically optimised -rimless reflector

SPECIFICATIONS	
Model Number	EO-HB-100W-II
Optional Microwave Sensor	Daylight & Occupancy
Driver	Meanwell HGB
LED Chip	Phillips Luxeon 3030
Power Consumption	100.4 (LCP)
LED Luminous Flux	>12,000Lm
LED Luminous Efficiency	>120Lm /W
Lumen Maintenance L70	70% > 54,000 hrs
Illuminated Area	At 4m – 11m diameter At 6m – 17m diameter At 8m – 25m diameter At 10m – 29m diameter
Input Voltage	240 Volts, 50 Hz
Power Factor	>0.93
Working Environment	-40°C - +60°C
Body Material	Die Cast Aluminium Alloy and PC
Reflector	30, 60 & 100' high performance polished photometrically optimized rimless reflectors available Please specify when ordering
IP Rating	IP 65
Rendering Index CRI	Ra >80
Colour Temperature	5500 Kelvin Standard Other kelvins available to order
Certificate	SAA 161 296 IEC 605982.1B IEC 61346.2.13:2006 N28689
Life Expectancy	>50,000 hrs
Net Weight	5.8 kg
Warranty	5 years

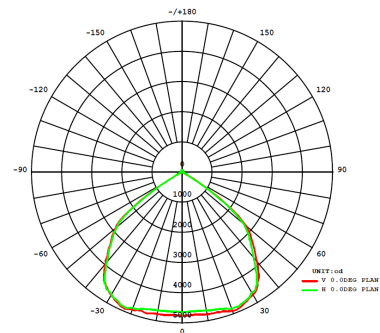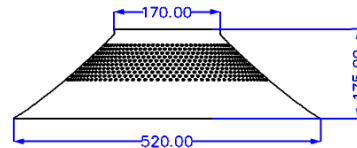

For more information visit our website: [www.eolighting.com.au](http://www.eolighting.com.au)