



## LED Flood/Street Light

## EO-FL-TRI-60W

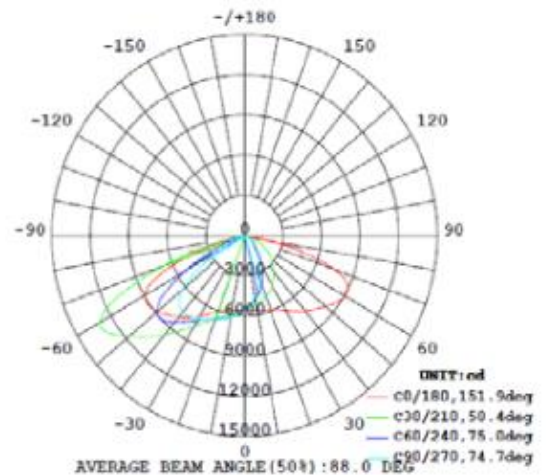

SPECIFICATIONS	
Product Code	EO-FL TRI-60W
LED Initial Flux	8000 lm
Power Consumption	53 Watts $\pm$ 5W
Lumens Efficiency	140lm/W
LED Chip	Nichia NF2W757GR-V1
Light Distribution Curve (Beam Pattern)	Asymmetrical (Bat Wing) / Rectangular Beam 140° x65°
Input Voltage	240- 277 VAC
Colour Rendering Index	75 (Ra)
Frequency Range	50/60Hz
Power Factor	$\geq$ 0.95%
Operating Environment	-40°C ~ +45°C, 15%~90%RH
Material	Die Cast Aluminium Alloy & PC Anticorrosive Grade – WF1
Net Weight	4.6kg
Beam Angle	Horizontal Axis: 140° Vertical Axis: 65°
IP Rating	IP65
Lifetime Hours L <sub>70</sub>	$\geq$ 100,000 Hrs
Dimensions	L570mm x W139 x H99mm
Colour Temperature	4500 – 5500K
Certificate	SAA 180909 AS/NZS 60598 2.5:2002 AS/NZS 60598 1:2017  N28689
Warranty	5 years

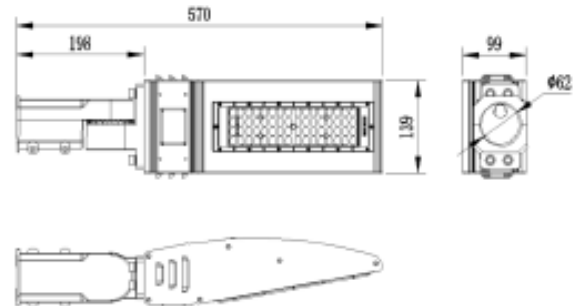

For more information visit our website: [www.eolighting.com.au](http://www.eolighting.com.au)